


## PROFILI ESTRUSI POLIETILENE ESPANSO

### ► PROFILI TIPO “U”

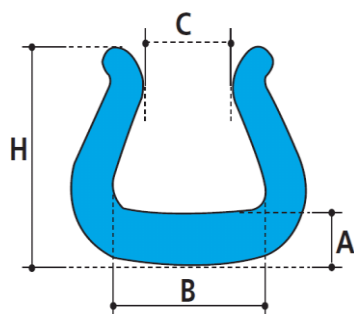

| TIPO   | ML<br>SCAT | A               | B               | C                | H                |
|--------|------------|-----------------|-----------------|------------------|------------------|
| 5-15   | 700        | 8 mm<br>± 2 mm  | 16 mm<br>± 3 mm | 5 mm<br>± 3 mm   | 28 mm<br>± 3 mm  |
| 10-20  | 500        | 11 mm<br>± 2 mm | 20 mm<br>± 3 mm | 10 mm<br>± 3 mm  | 35 mm<br>± 3 mm  |
| 15-25  | 400        | 11 mm<br>± 2 mm | 24 mm<br>± 3 mm | 13 mm<br>± 3 mm  | 37 mm<br>± 3 mm  |
| 20-35  | 250        | 12 mm<br>± 2 mm | 35 mm<br>± 1 mm | 17 mm<br>± 4 mm  | 48 mm<br>± 2 mm  |
| 30-45  | 200        | 13 mm<br>± 2 mm | 45 mm<br>± 3 mm | 25 mm<br>± 5 mm  | 52 mm<br>± 3 mm  |
| 30-40  | 140        | 20 mm<br>± 2 mm | 39 mm<br>± 3 mm | 23 mm<br>± 5 mm  | 65 mm<br>± 3 mm  |
| 45-65  | 144        | 14 mm<br>± 2 mm | 65 mm<br>± 3 mm | 35 mm<br>± 5 mm  | 64 mm<br>± 3 mm  |
| 40-60  | 120        | 20 mm<br>± 2 mm | 59 mm<br>± 3 mm | 32 mm<br>± 5 mm  | 63 mm<br>± 3 mm  |
| 60-85  | 112        | 14 mm<br>± 2 mm | 84 mm<br>± 3 mm | 42 mm<br>± 8 mm  | 65 mm<br>± 3 mm  |
| 80-100 | 80         | 20 mm<br>± 2 mm | 96 mm<br>± 3 mm | 60 mm<br>± 10 mm | 65 mm<br>± 4 mm  |
| 28-85  | 120        | 28 mm<br>± 2 mm | 30 mm<br>± 3 mm | 15 mm<br>± 5 mm  | 90 mm<br>± 5 mm  |
| 35-80  | 168        | 15 mm<br>± 2 mm | 34 mm<br>± 3 mm | 15 mm<br>± 5 mm  | 85 mm<br>± 5 mm  |
| 72-120 | 60         | 18 mm<br>± 2 mm | 77 mm<br>± 5 mm | 30 mm<br>± 15 mm | 120 mm<br>± 5 mm |

### ► CARATTERISTICHE

MATERIALE: PE espanso, senza CFC e HCFC.

Colore: blu.

Lunghezza standard: 2000 mm ± 40 mm.

Densità: 28/32 kg/mc

Misura scatola: 2100x600x450 mm.

Volume scatola: 0,57 mc.