

UB




This dispenser permits easy and quick use of aluminium tapes (with or without liner) to seal the open side of multiwall polycarbonate sheets preventing dirt and insects from entering the interior. This is not only an aesthetic advantage but provides an economic benefit to greenhouses. It also avoids frequent cuts on fingers due to the manual application of the aluminium tape.

- ✓ Strong body structure, made of sheet steel, strengthened by deep ribs. It is coated by epoxy-polyester powder paint.
- ✓ The toothed blade is made of hard steel. The special process of production gives sharp and strong teeth for an efficient cut of the adhesive tape.
- ✓ The core holder and the spool for the liner is provided with adjustable brakes.
- ✓ The applying roller is covered by soft rubber.
- ✓ The anatomic handle is made of ABS resin.
- ✓ It is produced for different panel thickness : from 4 mm to 40 mm.
- ✓ They take tapes up to 140mm (tapes with liner) - 160mm (tapes without liner) of external diameter on 76 mm (3") cores. In order to change from tapes with liner to tapes without liner it is necessary a small and

quick modify of the dispenser. It is necessary to take away the spool and substitute it with the silicone roll (included in package).

- ✓ The package also include plastic rings. They are used on the core holder in addition to the white plastic plate in order to keep the tape in the centre of the dispenser.

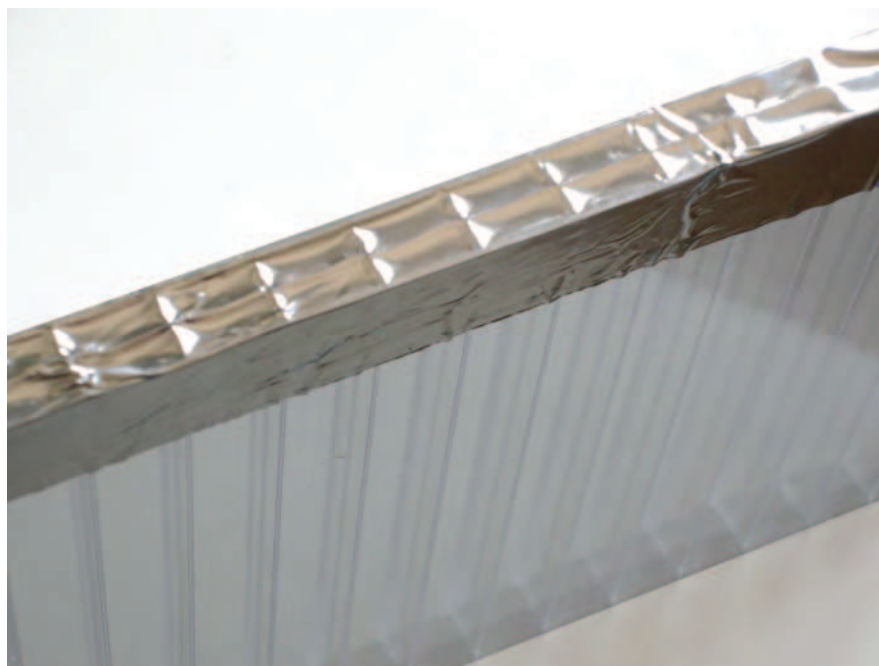

Sealed multiwall polycarbonate sheet

Technical characteristics

Code	Description	Tape width mm	Max tape Ø mm	Core holder Ø "	Net weight Kg	Pcs per carton
1 321 004	UB/4	50	140-160	3	1,545	1
1 321 006	UB/6	50	140-160	3	1,545	1
1 321 008	UB/8	50	140-160	3	1,545	1
1 321 010	UB/10	50	140-160	3	1,545	1
1 321 016	UB/16	50	140-160	3	1,545	1
1 321 020	UB/20	50	140-160	3	1,545	1
1 321 025	UB/25	75	140-160	3	1,730	1
1 321 032	UB/32	75	140-160	3	1,730	1
1 321 040	UB/40	75	140-160	3	1,730	1